


Z40W-150Lb-00

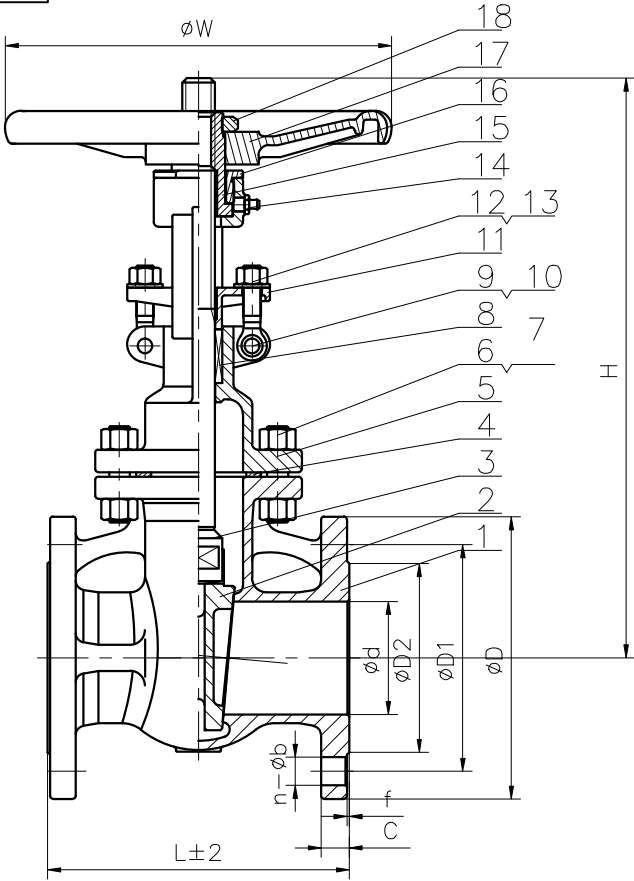

DN	L	d	D	D1	D2	C	f	n- ϕ b	W	H
40	165	38	125	98.4	73	17.4	2	4- ϕ 16	180	275
50	178	50	150	120.7	92.1	16.3	2	4- ϕ 19	200	309
65	191	65	180	139.7	104.8	17.9	2	4- ϕ 19	240	343
80	203	76	190	152.4	127	19.5	2	4- ϕ 19	260	390
100	229	99	230	190.5	157.2	24.3	2	8- ϕ 19	280	451
125	254	125	255	215.9	185.7	24.3	2	8- ϕ 23	300	517
150	267	150	280	241.3	215.9	25.9	2	8- ϕ 23	320	587
200	292	200	345	298.5	269.9	29	2	8- ϕ 23	350	729

Nominal pressure				150 LB			
Test pressure	Shell test	3.0	MPa	test medium	water	Test temperature	normal temperature
	seal test	2.2					
	Gas seal test	0.6			air		
Applicable medium			water,oil,gas				
Applicable temperature			-29~425℃				

Standards:

1 Design and manufacture: API 603

2 Face to Face dimension: ASME B16.10

3 Flanged End: ASME B16.5 RF

4 Pressure temperature ratings: ASTM B16.34

5 Pressure test: API 598

18	H.W.LOCK NUT	1	A351 CF8
17	HANDWHEEL	1	QT200
16	BONNET NUT	1	A351 CF8
15	STEM NUT	1	CU
14	LUBRICATOR	1	H62
13	NUT	2	A2-70/304
12	SPRING WASHER	2	SS304
11	GLAND	1	A351 CF8
10	GLAND BOLT	2	A2-70/304
9	PIN	2	SS304
8	PACKING	—	GRAPHITE
7	NUT	—	A2-70/304
6	BOLT	—	A2-70/304
5	BONNET	1	A351 CF8
4	GASKET	1	SS304+GRAPHITE
3	STEM	1	SS304
2	DISC	1	A351 CF8
1	BODY	1	A351 CF8

NO.	DRAWING NO.			DESCRIPTION	Q'TY	MATERIAL	REMARKS
				GENERAL DRAWING	ANIX VALVE CO.,LTD		
MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE				
DRA.		APP.					Flange G t Valve
						SCALE	
CHK.		DATE					BVH13F 4P/1000